

ENERQUIX

AC Type - EV Charger



SINCE 1985



7 Factories

60 Products

Exports to over 50 Countries

4 Decades of
Engineering Excellence



salzer

Salzer Electronics Limited, an ISO 9001/14001/45001 & IATF Certified Company, operates seven state-of-the-art manufacturing facilities, supported by a robust R&D center recognized by the Ministry of Science & Technology, Government of India. These facilities are equipped with a comprehensive testing laboratory to ensure the production of high-quality, value-added products that meet international standards, including UL, CSA, IEC, and CE certifications.

Salzer offers an extensive range of electrical products, including rotary switches, load break switches, relays, contactors, MPCBs, MCBs, plug and sockets, transformers, wires and cables, modular switches, limit / foot switches, Panel Accessories etc .

These products are globally recognized for their quality and durability.

Salzer Electronics Limited is a prominent player in India's electrical and electronics sector, Salzer has made a significant entry into the electric vehicle (EV) charging sector. This strategic move aligns with the growing demand for EV infrastructure as India accelerates its shift toward sustainable mobility. By venturing into EV chargers, Salzer aims to diversify its product offerings and capitalize on the rising adoption of electric vehicles. The company is positioning itself to contribute to India's evolving electric mobility ecosystem while capitalizing on the expanding opportunities in the green technology space.

Engineering Excellence

- Manufacturing infrastructure facilities duly supported by modern techniques like TQM, TPM, Six Sigma, Lean Manufacturing & 5-S.
- Multi-barrier quality checks to ensure that the entire product range conforms to stringent quality parameters.
- Continuous upgradation at all levels by the implementation and maintenance of Total Quality Management.
- Quality certifications such as CB, CE, UL, CSA, S Mark on applicable range of products.
- Dedication to continuous product development through Innovation and setting new benchmarks.
- A full-fledged R&D center that is recognized by the Department of Scientific & Industrial Research, Government of India.
- Self-sufficient and a captive Tool Room.
- Sophisticated in-house type testing laboratory with test capacity up to 900 Amps with 1200V DC as per various IS & IEC product standards.

ENERQUIX

Residential / Commercial EV Chargers - AC Type



Features



Wi-Fi & 4G LTE



QR Code Payment



Charger
Pre Booking



LED Indication



Earth Fault/ Surge
Protection



Emergency Stop



Encrypted User
Privacy Protection



OCPP 1.6 JSON




24/7 monitoring



Configurable Over Current,
Under Current, Over Voltage,
Under Voltage

CMS & Mobile App



- Instant Charging Station Troubleshooting via OTA
- Service Request through App
- Instant Tariff Management
- OTA Start/Stop Transaction
- Instant User Creation
- Charge Point Operator Management
- Dynamic Alerts and Notifications
- Wallet Maintenance
- Analytics for charging stations
- Customizable charging profiles
- Encrypted cloud servers
- Multiple user login methods



3.3 kW Charger



Technical Data

Model	3.3 kW
Input Supply	230VAC ± 10%
Connection Type	P+N+PE
AC Output Current	16 Amp
Max. Output Power	3.3 kW
Connector	Modular Socket
Display	1.3" OLED
Communication Network	Wi-Fi & GSM
Energy Measurement	Class 1 Meter
Operating Temperature	0°C to 70°C
Storage Temperature	0°C to 70°C
Humidity	5 to 95%
IP Rating	IP58

Dimensional Detail

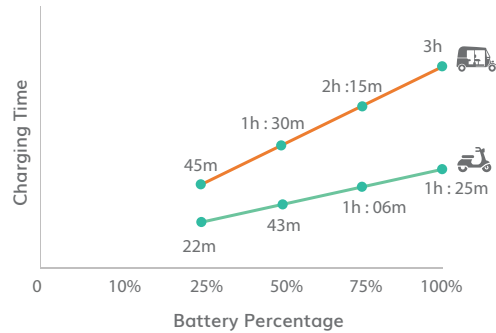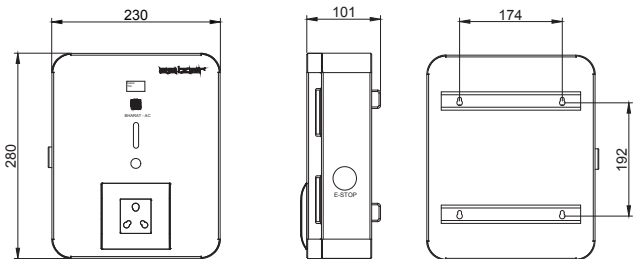

Approximate Charging Time

Charging Ports	Ordering Code	Vehicle	Approx. Charging Time (h:m)			
			10-25%	10-50%	10-75 %	10-100%
16A Modular Socket	SEVCSA033		22m	43m	1h:06m	1h:25m
16A Industrial Socket	SEVCSB033		45 m	1H:30 m	2H:15 m	3H:00 m
32 Amps CCS Type 2 IEC 62196-2	-		N/A	N/A	N/A	N/A

*Charging time varies based on Battery Capacity & Condition. Timings shown are only Approximate values

Ordering Code

Rating	Ordering Code	Connector Type
3.3 kW	SEVCSA033	Modular Socket 16 Amp - 1 No
	SEVCSB033	Industrial Socket 16 Amp - 1 No



7.4 kW Charger



Technical Data

Model	7.4 kW
Input Supply	230VAC ± 10%
Connection Type	P+N+PE
AC Output Current	32 Amp
Max. Output Power	7.4 kW
Connector	CCS Type 2 IEC 62196-2
Display	20 x 4 LCD
Communication Network	Wi-Fi & GSM
Energy Measurement	Class 1 Meter
Operating Temperature	0°C to 70°C
Storage Temperature	0°C to 70°C
Humidity	5 to 95%
IP Rating	IP58

Dimensional Detail

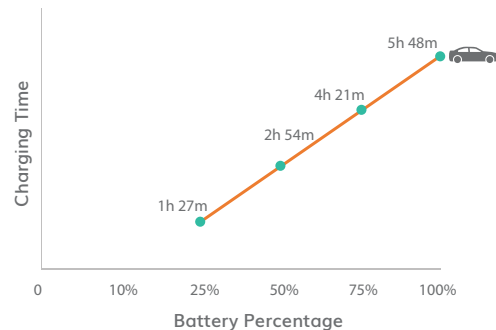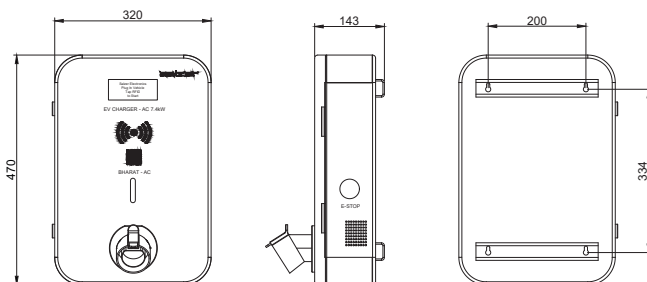

Approximate Charging Time

Charging Ports	Ordering Code	Vehicle	Approx. Charging Time (h:m)			
			10-25%	10-50%	10-75 %	10-100%
16A Modular Socket	-		N/A	N/A	N/A	N/A
16A Industrial Socket	-		N/A	N/A	N/A	N/A
32 Amps CCS Type 2 IEC 62196-2	SEVCSCO074		1h:27m	2h:54m	4h:21m	5h:48m

*Charging time varies based on Battery Capacity & Condition. Timings shown are only Approximate values

Ordering Code

Rating	Ordering Code	Connector Type
7.4 kW Charger	SEVCSCO074	CCS Type 2 - 1 No



10 kW Charger



Technical Data

Model	10 kW
Input Supply	415VAC ± 10%
Connection Type	L1+L2+L3+N+PE
AC Output Current	16 Amp / Phase
Max. Output Power	10 kW
Connector	Modular Socket x 2 Industrial Socket IEC 60309
Display	20 x 4 LCD
Communication Network	Wi-Fi & GSM
Energy Measurement	Class 1 Meter
Operating Temperature	0°C to 70°C
Storage Temperature	0°C to 70°C
Humidity	5 to 95%
IP Rating	IP58

Dimensional Detail

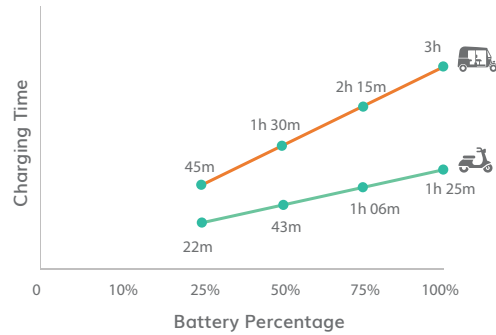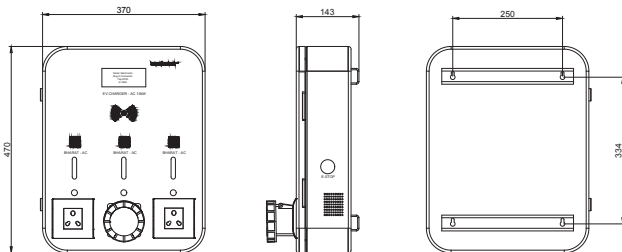

Approximate Charging Time

Charging Ports	Ordering Code	Vehicle	Approx. Charging Time (h:m)			
			10-25%	10-50%	10-75 %	10-100%
16A Modular Socket	SEVCTD010		22m	43m	1h:06m	1h:25m
16A Industrial Socket	SEVCTE010		45 m	1H:30 m	2H:15 m	3H:00 m
32 Amps CCS Type 2 IEC 62196-2	-		N/A	N/A	N/A	N/A

*Charging time varies based on Battery Capacity & Condition. Timings shown are only Approximate values

Ordering Code

Rating	Ordering Code	Connector Type
10 kW Charger	SEVCTE010	Modular Socket 16 Amp - 3 Nos
	SEVCTF010	Industrial Socket 16 Amp - 3 Nos



14 kW Charger



Technical Data

Model	14 kW
Input Supply	415VAC ± 10%
Connection Type	L1+L2+L3+N+PE
AC Output Current	32 Amp / Phase
Max. Output Power	14 kW
Connector	Modular Socket and Industrial Socket IEC 60309, CCS Type 2 IEC 62196-2
Display	20 x 4 LCD
Communication Network	Wi-Fi & GSM
Energy Measurement	Class 1 Meter
Operating Temperature	0°C to 70°C
Storage Temperature	0°C to 70°C
Humidity	5 to 95%
IP Rating	IP58

Dimensional Detail

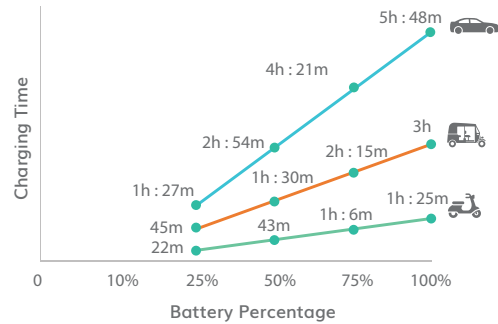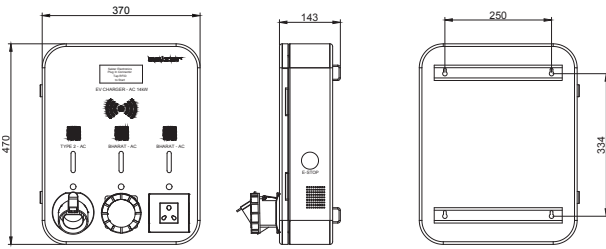

Approximate Charging Time

Charging Ports	Ordering Code	Vehicle	Approx. Charging Time (h:m)			
			10-25%	10-50%	10-75 %	10-100%
16A Modular Socket	SEVCTH014		22m	43m	1h:06m	1h:25m
16A Industrial Socket	SEVCTI014		45 m	1H:30 m	2H:15 m	3H:00 m
32 Amps CCS Type 2 IEC 62196-2	SEVCTJ014		1h:27m	2h:54m	4h:21m	5h:48m

*Charging time varies based on Battery Capacity & Condition. Timings shown are only Approximate values

Ordering Code

Rating	Ordering Code	Connector Typ
14 kW Charger	SEVCTH014	CCS Type 2 + Industrial Socket 16 Amp + Modular Socket 16 Amp



15 kW Charger



Technical Data

Model	15 kW
Input Supply	415VAC ± 10%
Connection Type	L1+L2+L3+N+PE
AC Output Current	32 Amp / Phase
Max. Output Power	15 kW
Connector	CCS Type 2 IEC 62196-2 x 2
Display	20 x 4 LCD
Communication Network	Wi-Fi & GSM
Energy Measurement	Class 1 Meter
Operating Temperature	0°C to 70°C
Storage Temperature	0°C to 70°C
Humidity	5 to 95%
IP Rating	IP58

Dimensional Detail

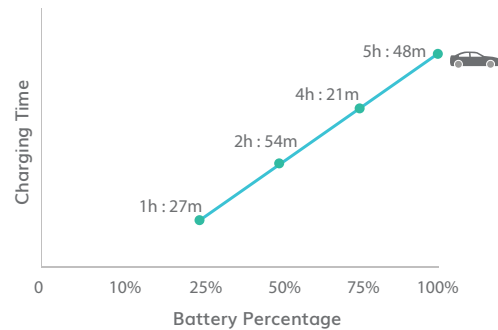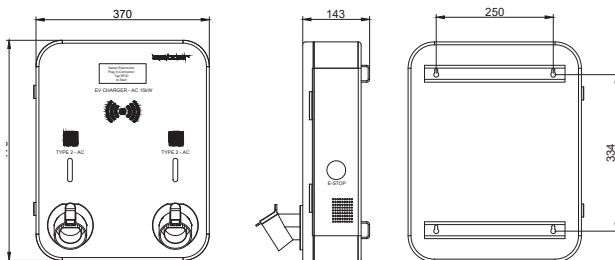

Charging Time (Approx.)

Charging Ports	Ordering Code	Vehicle	Approx. Charging Time (h:m)			
			10-25%	10-50%	10-75 %	10-100%
16A Modular Socket	-		N/A	N/A	N/A	N/A
16A Industrial Socket	-		N/A	N/A	N/A	N/A
32 Amps CCS Type 2 IEC 62196-2	SEVCTK015		1h:27m	2h:54m	4h:21m	5h:48m

*Charging time varies based on Battery Capacity & Condition. Timings shown are only Approximate values

Ordering Code

Rating	Ordering Code	Connector Type
15 Kw Charger	SEVCTK015	CCS Type 2 - 2 Nos



22 kW Charger



Technical Data

Model	22 kW
Input Supply	415VAC ± 10%
Connection Type	L1+L2+L3+N+PE
AC Output Current	32 Amp / Phase
Max. Output Power	22 kW
Connector	CCS Type 2 IEC 62196-2
Display	20 x 4 LCD
Communication Network	Wi-Fi & GSM
Energy Measurement	Class 1 Meter
Operating Temperature	0°C to 70°C
Storage Temperature	0°C to 70°C
Humidity	5 to 95%
IP Rating	IP58

Dimensional Detail

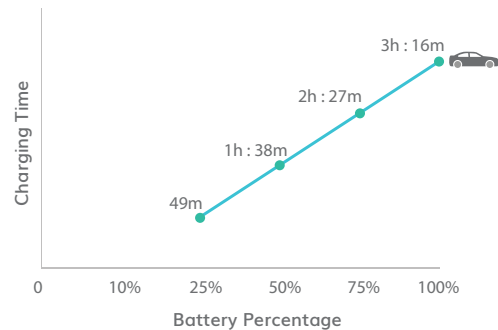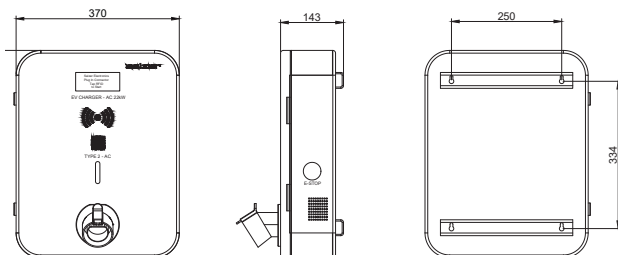

Charging Time (Approx.)

Charging Ports	Ordering Code	Vehicle	Approx. Charging Time (h:m)			
			10-25%	10-50%	10-75 %	10-100%
16A Modular Socket	-		N/A	N/A	N/A	N/A
16A Industrial Socket	-		N/A	N/A	N/A	N/A
32 Amps CCS Type 2 IEC 62196-2	SEVCTL022		49m	1H:38m	2H:27m	3H:13m

*Charging time varies based on Battery Capacity & Condition. Timings shown are only Approximate values

Ordering Code

Rating	Ordering Code	Connector Type
22 kW Charger	SEVCTL022	CCS Type 2 - 1 No



ISO 9001 | ISO 14001 | ISO 45001 | IATF CERTIFIED

Salzer Electronics Limited

Samichettipalayam, Coimbatore - 641 047. India.

Ph: +91-422-4233600, 1800 1030 161 | Email: salzer@salzergroup.com

www.salzergroup.com